



HIGH POWER & EXCELLENT CUTTING PERFORMANCE

PROVIDES THE BEST POWER, TORQUE AND BALANCE WHILE CUTTING.

OFFERS 9% HIGHER CUTTING PERFORMANCE IN COMPARISON WITH THE PREVIOUS MODEL.


	CS-260TES	CS-280TES
Engine displacement	26.9 cm ³	26.9 cm ³
Output	0.86kW / 1.17ps	1.04kW / 1.41ps
Emission	ST1	ST2

OPERATOR COMFORT

CHOKE LINKED INTEGRATED IGNITION CONTROL.

TOOL-LESS AIR CLEANER COVER

VIBRATION-REDUCTION SYSTEM

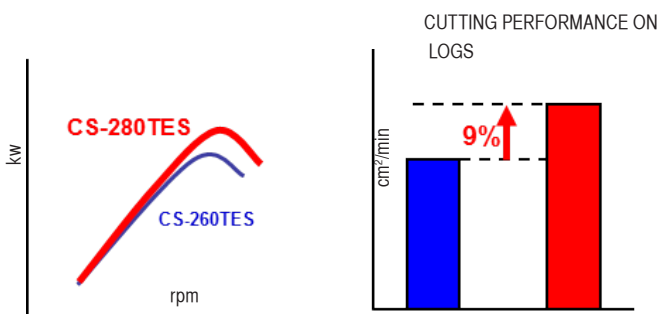

Engine Displacement (cm ³)	Dry Weight* (kg)	Output (kW/ps)	Fuel Tank Capacity (L)	Oil Tank Capacity (L)	Guide Bar Length (cm)	Saw Chain Pitch (inch)	Gauge (inch)
26.9	3.0	1.07 / 1.46	0.24	0.16	T, TES 20,25,30 TES C 25	T, TES 3/8 TES C 1/4	0.050

* w/o Guide bar & Saw chain

CS-280T / TES CS-280TES C

POWERFUL AND COMFORTABLE TOP HANDLE SAW

